











CR-V Hybrid (RT*, 2019-)

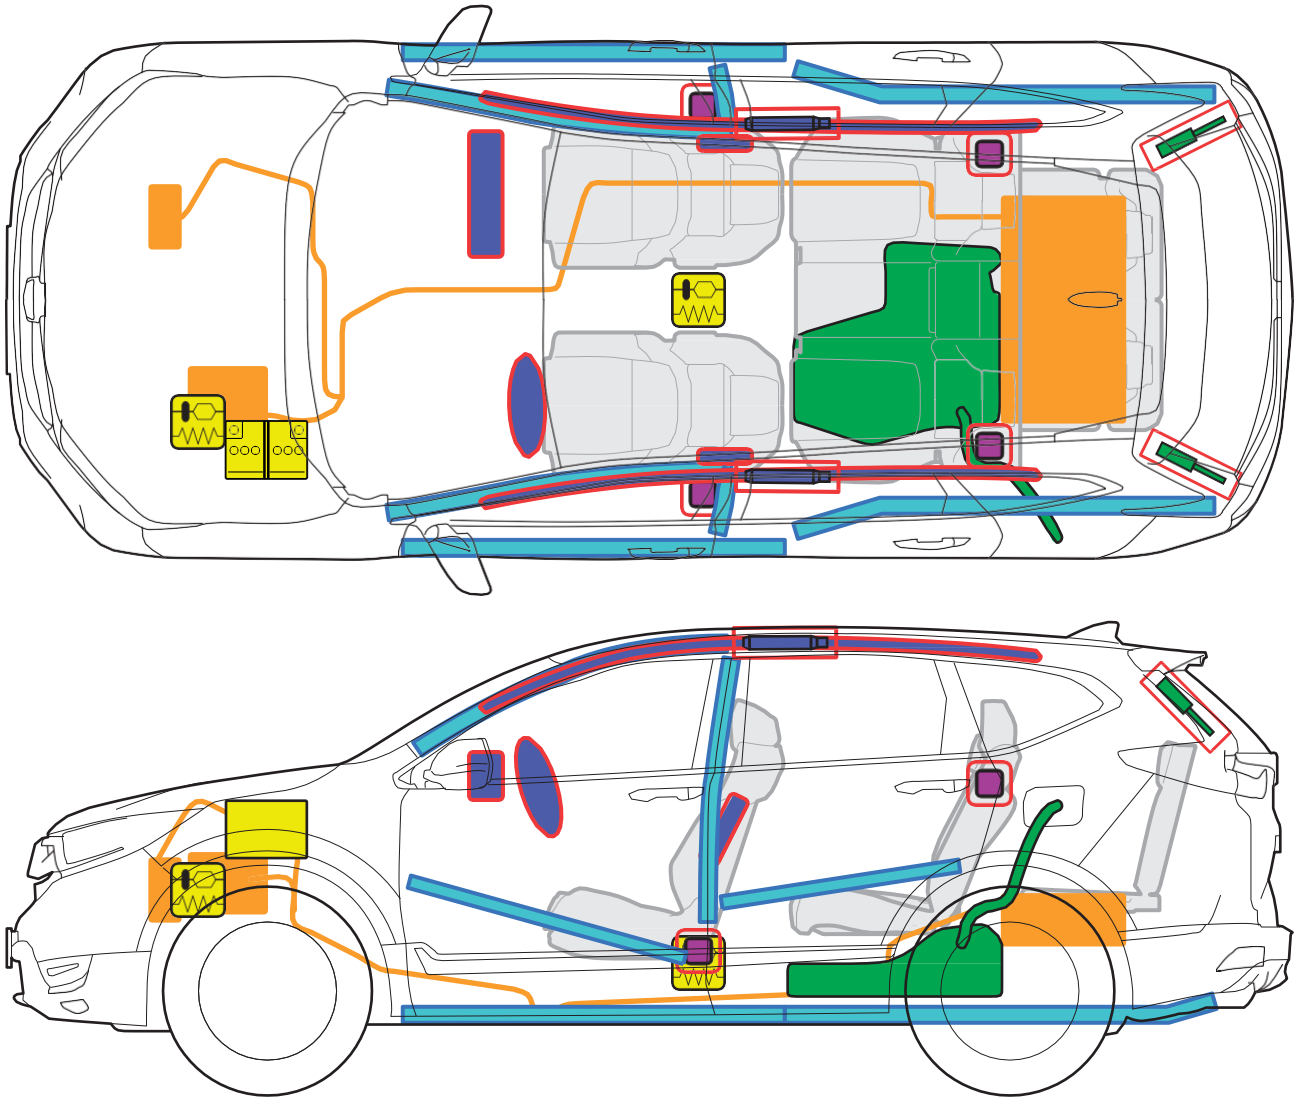

Legend

	Airbag		Structural reinforcements		Control unit
	Gas-Generator		Gas filled spring unit		12 Volt-Battery
	Seat belt tensioner		Fuel tank		High Voltage component



Speciality:

High voltage more than 259 Volt! Don't touch high voltage components!
Identification of Hybrid and details see back side!

Detection characteristics:

- Hybrid logo on fenders and right side of Tailgate
- Orange coloured wires, or wire covers

	<p>High Voltage shut down Push and hold the ENGINE START/STOP button for 2 seconds remove remote control from the vehicle and move it at least for 10m away or Locate and cut the negative 12 Volt Battery cable and the DC/DC converter cable</p>
--	---


	<p>Electric shock! Unprotected contact with any charged high-voltage component can cause serious injuries or death!</p>
--	--

Identification of the remaining high voltage components:



The high voltage battery is located in the trunk

<p>Push and hold = 2 s</p>	
<p>Shut down procedure 1: Push and hold = 2s Up to 5 min after deactivation still high voltage on system.</p>	

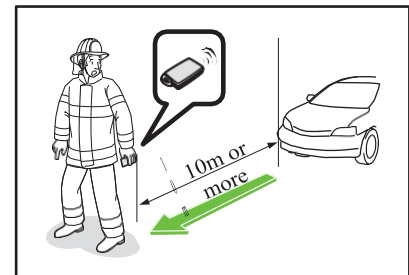

Shut down procedure 2: Remove or cut the negative terminal side from 12V battery. Remove fuse box cover, and remove or cut front terminal in the picture

